

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



543/14

(43) International Publication Date
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number
WO 2004/065834 A1

(51) International Patent Classification⁷: F16K 41/02

(21) International Application Number:
PCT/EP2004/000495

(22) International Filing Date: 22 January 2004 (22.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO2003A 000028 22 January 2003 (22.01.2003) IT

(71) Applicant and

(72) Inventor: VARRIALE, Vincenzo [IT/IT]; Via Trento,
1/D, I-20060 Cassina de' Pecchi - Milano (IT).

(74) Agents: BOTTI, Mario et al.; Botti & Ferrari S.r.l., Via
Locatelli, 5, I-20124 Milano (IT).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A STUFFING SEAL

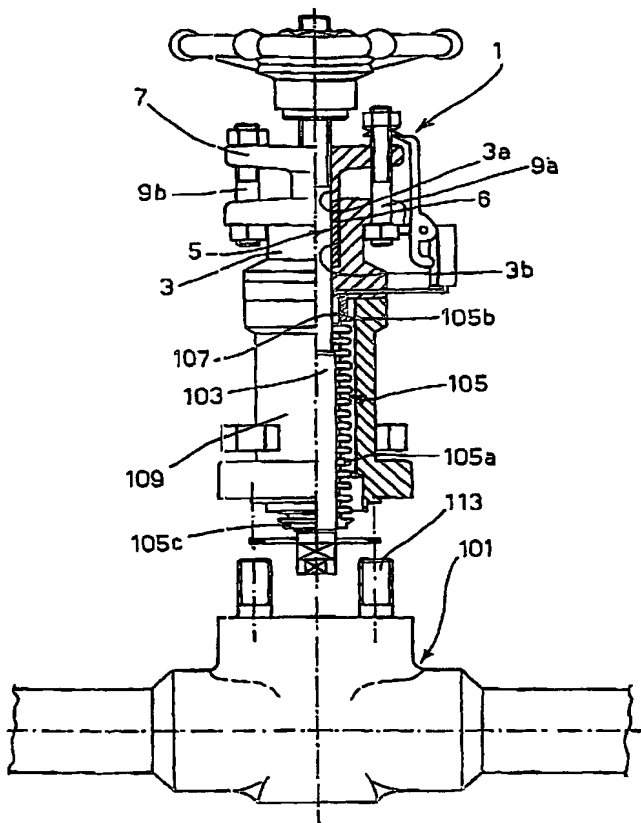

(57) Abstract: The present invention relates to a stuffing seal comprising a case (3a) provided with an axial hole (3a) for the passage of a stem (103) being mobile with respect to said case (3); a gasket or packing (5) arranged in a seat (3b) formed within said hole (3a) between said case and said stem; and a stuffing box (7) for compressing said packing (5) between said case (3) and said stem (103), wherein releasable means (11) are provided to perform an axial thrust on said stuffing box (7), so as to cause a compression of said packing (5) between said case and said stem.

WO 2004/065834 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- 1 -

Title: A stuffing seal.

DESCRIPTION

Technical Field

The present invention relates to a stuffing seal.

- 5 The stuffing seal according to the invention is particularly applied in the field of the valves for fluids and it can be advantageously used as auxiliary seal, which intervenes in case of breakage of a primary seal.

Background Art

- 10 Stuffing seals are largely used for realising a seal between a shaft or mobile stem and a fixed body: they generally comprise a fixed case provided with a hole passing through the opening of a shaft or stem, a gasket or packing arranged within said hole between the case and the shaft or stem and a stuffing box which, through various systems, is axially pressed against the packing, thus compressing it between said case and
15 said shaft or stem.

Stuffing seals are widely diffused in the field of valves for fluids; moreover, they are often used as auxiliary seals in the valves equipped with confining systems of other type (e.g. bellow seals), in order to avoid massive leaks of fluid in case of breakage of said confining systems.

- 20 One of the main problems of stuffing seals is represented by the loss of efficiency of the packing seal on the stem with the passage of time, due to wear or dryness of the primer, which generally impregnates the packing material.

- 25 Seals are known, which remedy said problem by means of springs (helical or, preferably, cup-like) which keep the packing constantly under pressure, compensating the wear thereof. An example of these seals is described in US 4,340,204.

This solution is disadvantageous because it constantly submits the packing to a strong pressure which stresses the friction wear.

- 30 Moreover, in the case wherein the stuffing seal is used as auxiliary seal, the above solution is disadvantageous, since the packing is kept under pressure also when the seal is already ensured by the primary confining systems provided under normal operating conditions. This speeds the packing wear and it is source of useless frictions on the valve
35 stem.

Disclosure of Invention

A first aim of the present invention is thus that of realising a stuffing

- 2 -

seal which does not has the above drawbacks and which ensures an efficient seal with time.

A second aim of the present invention is that of realising a stuffing seal advantageously usable as auxiliary seal able to avoid massive leaks of fluid in case of breakage of the primary confining systems.

A third aim of the invention is that of realising a stuffing seal of simple and economic production.

These and other aims are attained by the stuffing seal as claimed in the appended claims.

Advantageously, according to the invention, since the means for compressing the packing are normally kept in a position wherein they do not perform any pressure on said packing and they are quickly released only in case of need, the seal efficiency is ensured for a long period being the wear of the packing during the ordinary seal operation avoided.

Moreover, in the case of applications of a valve for fluids to the stem, said quick releasing means for compressing the packing are automatically controlled by an actuator in response to a leak of fluid further to a breakage of the primary confining means. Advantageously, the stuffing seal according to the invention also comprises means which exploit the pressure of the fluid itself for causing a partial compression of the packing, thus ensuring that the seal of said packing on the stem is increased in case of seeping of the fluid along said stem.

In the bellow valves the packing is a an emergency seal system, which must be sized for the entire operating life of the primary seal, unless maintenance interventions are carried out during operation, meeting the costs of it.

In case of a packing starting to operate when called for it because of a fault of the primary seal, it will be highly sure the finding of an efficient component, a saving on the sizes of the packing, a warning when starting to operate due to breakage of the primary seal, a lower length of the stem and sizing of the same, a reduced size and weight of the valve, a lower torque and subsequently a saving on the cost of the actuator, with a reduction of the operating costs.

Further characteristics and advantages of the present invention will be more apparent from the following description of some preferred embodiments, given by way of non-limiting example and shown in the attached drawings, wherein:

Brief Description of Drawings

Figure 1 is a partial section view of a valve for fluids provided with a stuffing seal according to the invention;

5 Figure 2 is a section view of a detail of the valve of Figure 1, relative to the stuffing seal according to the invention, with the packing being not compressed;

Figure 3 is a section view of a detail of the valve of Figure 1, relative to the stuffing seal according to the invention, with the packing being compressed;

10 Figure 4a is a section view of the porous ring;

Figure 4b is a section view of the porous ring according to a varying embodiment;

Figure 5 is a section view of a detail of the valve of Figure 1 with the packing being not compressed, in a varying embodiment of the invention.

15 Modes for Carrying Out the Invention

With reference to Figure 1 a valve for fluids 101 is shown, which comprises a stuffing seal 1 according to a first embodiment of the invention.

20 Valve 101 is a valve of the type employed for intercepting special fluids requiring particular care for avoiding fluid leaks outside. These fluids are for example damaging, dangerous or expensive fluids.

To this purpose, valve 101 comprises a primary seal, the bellow seal 105 and a secondary seal, the stuffing seal 1.

25 The bellow seal 105 surrounds part of the stem 103 of valve 101. Said bellow seal 105 comprises a cylindrical body 105a, preferably multilayer, having a wavy profile. Said cylindrical body 105a is housed within a casing 109 fixed to the pivots 113 of valve 101 and it is therewith united by means of a ring 105b. At the opposite end with respect to the ring 105a, the body 105a is fixed, e.g. by welding, to a plate 105c provided
30 with a central hole for the passage of the stem 103. In this way, inside the bellow 105 a volume 107 is defined, wherein the end portion of the stem 103 is housed, which stem is thus kept hermetically separated from the process fluid flowing through the valve 101.

35 The stuffing seal 1 comprises a case 3 provided with an axial hole 3a for the passage of the stem 103, a gasket or packing 5 arranged in a suitable seat 3b formed within said hole 3a between said case and said stem 103 and a stuffing box 7 for compressing said packing 5 between

- 4 -

said case 3 and said stem 103. The packing 5 is formed of a series of overlapped metal, or preferably, polymeric resin rings 6. The stuffing box 7 is fixed to the case 3 by means of a pair of blocking pivots 9a, 9b, parallel to said stem 103, so that said stuffing box 7 and/or said case 3 can slide axially with respect to said pivots 9a, 9b.

As it can be better seen in Figures 2 and 3, the stuffing seal 1 also provides means that, by acting on the stuffing box 7, allow to axially compress the packing 5 between the case 3 and the stem 103, increasing the seal of said packing 5 on said stem 103. In the preferred embodiment said means are made of a cup-like spring 11 mounted on the stem portion 10a of one of said blocking pivots 9a, which extends axially with respect to said stuffing box 7.

It is to be noted, however, that under normal operating conditions, to which Figure 2 relates, i.e. when the seal on the stem 103 is ensured by the primary seal 105, said spring 11 is kept separated from the stuffing box 7 and it is compressed against the nut 13a of the pivot 9a by a blocking tooth 15a placed at the end of a lever 15 of first kind pivoted in 15a to a radial protrusion of the case 3. Under the above conditions, the packing 5 is not submitted to axial compression by the spring 11.

If the packing 5 is to be compressed, it is enough to act on the end 15c of the lever 15 opposed to the tooth 15a, approaching it to the case 3. In this way the rotation of the lever 15 around the fulcrum 15b leads the tooth 15a to radially depart in order to release the spring 11 and to allow it to extend up to the stuffing box 7 and, by acting thereon, to cause the axial compression of the packing 5. The above configuration is shown in Figure 3.

It is evident that the releasable means for compressing the packing 5, instead of the cup-like spring 11, can be made of any element able, if released, to perform a compression on the stuffing box 7 (e.g. an helical spring or piston sliding along the stem of pivot 9a).

It is also evident that the lever 15 can be substituted by any mobile element provided with a blocking tooth which can be made to pass from a position wherein said tooth retains said releasable means to a position wherein it releases said releasable means.

Since in the embodiment shown the stuffing seal 1 functions as auxiliary seal, it is preferable that the packing 5 is compressed only in case of breakage of the primary seal, i.e. in case of fluid leak and seeping

- 5 -

of said fluid along the stem 103.

Therefore, it is convenient that the lever 15 is not manually driven by an operator to release the spring 11 (operation anyway always possible), but that it is automatically driven by an actuator in case of fluid leak through the primary seal.

In figures 2 and 3 said actuator is a component of an leak detector 16 and it is made of a flexible membrane 17 placed inside the chamber 19 of said detector wherein the fluid coming from a leak through the primary bellow seal 105 can flow.

Said chamber 19 is connected with the volume 107 inside the bellow seal 105 through a channel 21. The flexible membrane 17 is constrained to the walls of the chamber 19, in order to hermetically separate said chamber from the external environment, and it has the face opposite to the chamber 19 facing the end 15c adjacent to the lever 15.

The configuration taken by said membrane 17 inside the chamber 19 depends on the ratio between the pressure inside and outside the chamber 19.

With reference to Figures 2 and 3, in case of fluid entering into the chamber 19, and of subsequent increase of the pressure inside said chamber, the membrane 17 takes a convex configuration with the convexity facing the surface 15b of the lever 15, thus causing the release of the spring 11 by the tooth 15a of said lever 15.

It is to be noted that, in case of multilayer bellow seals 105, the chamber 19 will be connected to the gap between two layers of said multilayer bellow seal 105, said gap being generally kept in depression. Since with the bellow seal 105 being intact also said chamber 19 is kept in depression, under these conditions the membrane 17 will keep a convex configuration with the convexity facing the chamber 19 (Figure 2), passing to a configuration with the convexity facing the outside of said chamber 19 (Figure 3), only in case of fluid leaks through the layers of the bellow seal 105 towards the chamber 19.

However, in several applications, it can be advantageous to connect said chamber 19 directly to the volume 107 comprised between the stem 103 and the bellow seal 105. First of all, this solution can be implemented also in plants wherein one-layer bellow seals are used, i.e. in less sophisticated and more economic plants. This solution would make thus possible the use of a prompt and reliable leak detecting system also in a

- 6 -

wide number of plants, also where a detecting system thus made is not required by regulations.

A solution of this kind also allows to incorporate the above leak detecting system in valves being already installed and operating.

5 Moreover, also in case of plants with valves using multilayer bellow seals, it can be convenient to connect the leak detector directly to said volume 107. In this way said detector signals a leak only in case of complete breakage of the bellow seal 105 and of effective seeping of fluid along the stem 103, i.e. of effective risk of contamination of the external
10 environment.

In this latter type of valves it is also possible to realise a redundant leak detecting system with a first detector being connected to the gap between the layers of the bellow seal which promptly detects a partial breakage of said seal, and a second detector connected to the volume
15 comprised between said bellow seal and the stem which detects a subsequent complete breakage of the seal.

In substitution of the flexible membrane 17, it will be possible, for example, to use a piezoelectric pressure detector connected to an electric circuit comprising an electromechanical actuator for said lever 15. Said
20 actuator will also be controlled by the variation of different magnitude such as for example fluid temperature or chemical composition thereof.

Always with reference to Figures 2 and 3 between the seat bottom 3b and the packing 5 a porous metal ring 23 and a plane washer 25 are interposed in sequence.

25 In case of breakage of the primary seal 105, the process fluid seeps along the stem 103, till it meets the porous ring 23. Thanks to the porosity of said ring 23, the fluid diffuses inside its volume performing a substantially uniform compression against the washer 25.

As it can be better seen in Figure 4a said ring 23 will advantageously
30 be realised in any material compatible with the process fluid, in particular from the point of view of the resistance to corrosion. Said porous ring 23 will be obtained by overlapping sintered metal net layers, by using metal alloys resistant to corrosion (stainless steel, Monel, Inconel, etc.)

Advantageously, the porosity of said ring 23 will be chosen according
35 to the density and viscosity of the process flow. In particular, by using sintered metal net overlapped layers, nets with different meshes will be used, the meshes being less thick in proximity of the face 23a of the ring

- 7 -

23 and then thicker and thicker while approaching the opposite face 23b of said ring.

The plane washer 25 is preferably a metal washer, realised with a metal or a metal alloy resistant to corrosion.

5 Said washer 25 and said porous ring 23 generally have the same diameter as the rings 6 forming the packing 5, but it will be also possible to realise a porous ring 23 with superior diameter with respect to that of said washer 25 and of said rings 6.

10 In order to interpose a further barrier between the process fluid and the packing 5, it is possible to insert, between the plane washer 25 and said packing 5 a flexible annular membrane, welded or glued along the external edge of the wall of the seat 3b of the packing 5.

15 Said membrane allows to avoid seepings along the wall of said seat 3b without interfering, thanks to its flexibility, with the axial thrust of the washer 25 on the rings of the packing 5.

The presence of said membrane is particularly advantageous in the case wherein the plane washer 25 has inferior diameter with respect to the porous ring 23.

20 According to a variation, shown in Figure 4b, by using a material with suitable characteristics (i.e. with good mechanical and corrosion resistance properties) it is also possible to realise the porous ring 23 and the washer 25 in a single hybrid ring 27, with a layered configuration, i.e. with a first porous axial portion 27a and a second full axial portion 27b.

25 The pressure of the fluid escaping on said porous metal ring 23 and said plane washer 25 is enough to axially compress the packing 5 increasing the seal thereof on the stem 103. As a consequence thereof, a pressure raise in the volume 107 and in the chamber 19 occurs causing the change of configuration of the membrane 17 and the subsequent release of the spring 11 against the stuffing box 7.

30 In order to obtain a light constant compression on the packing 5 it will be also possible to lightly tighten the nut 13b of the blocking pivot 9b whereon the spring 11 is not provided. Advantageously, this compression does not considerably influence the wear of the packing and the leaks caused because of friction against the stem 103.

35 With reference to Figure 5 a varying embodiment is shown wherein a second spring 27 is provided being interposed between said tooth 15a and the stuffing box 7. Said spring 27 constantly acts on the stuffing box 7,

- 8 -

producing a light and constant axial compression on the packing 5.

5 In case of release of the tooth 15a and consequent release of the spring 11, said second spring 27 expands releasing the stuffing box 7, but it will be contrasted by said spring 11 which, being provided with higher potential elastic energy, will bring said second spring 27 back against said stuffing box 7 compressing the packing 5.

It is evident that what has been described is given only by way of non limiting example and that variations and changes are possible within the scope of protection of the invention.

- 9 -

CLAIMS

1. A stuffing seal (1) comprising:

a case (3) provided with an axial hole (3a) for the passage of a stem (103) being mobile with respect to said case (3):

5 a gasket or packing (5) arranged in a seat (3b) formed within said hole (3a) between said case and said stem; and

a stuffing box (7) for compressing said packing (5) between said case (3) and said stem (103),

10 characterised in that it provides releasable means (11) for performing an axial thrust on said stuffing box (7) so as to cause a compression of said packing (5) between said case and said stem.

2. A stuffing seal (1) according to claim 1, wherein said case (3) and said stuffing box (7) are interconnected by at least a blocking pivot (9a, 9b) parallel to said stem, said stuffing box (7) and/or said case (3)
15 being sliding with respect to said pivot for allowing the axial compression of said packing (5).

3. A stuffing seal (1) according to claim 2, wherein said pivot (9a, 9b) comprises a portion (10a) axially extending outside said stuffing box (7), on said portion being provided said releasable means (11).

20 4. A stuffing seal (1) according to claim 1, wherein control means (15, 17) are provided for causing the release of said releasable means (11).

5. A stuffing seal (1) according to claim 1, wherein said releasable means (11) comprise at least one elastically deformed element and control means (15, 17) for causing the release thereof.

25 6. A stuffing seal (1) according to claim 5, wherein said elastically deformed element is a spring (11).

7. A stuffing seal (1) according to claim 4 or 5 or 6, wherein said control means comprise a mobile element (15) which can take a first position wherein said releasable means (11) are retained and a second
30 position wherein said releasable means (11) are released for performing a thrust along the axis of said stem (103) against said stuffing box (7).

8. A stuffing seal (1) according to claim 7, wherein said mobile element is an oscillating lever (15) with the fulcrum (15a) pivoted to said case (3), said lever comprising at an end a blocking tooth (15a) for
35 retaining said releasable means (11).

9. A stuffing seal (1) according to claim 8, wherein said lever (15) is a lever of the first kind comprising at the opposite end with respect to

- 10 -

said tooth (15a) a control surface (15c) whereon it is possible to act for letting said lever (15) pass from said first to said second position.

10. A stuffing seal (1) according to any of claims from 7 to 9, wherein said mobile element (15) is driven by means of an actuator device (17) driven by a leak detector (16).

11. A stuffing seal (1) according to claim 10, wherein said leak detector (16) comprises a chamber (19), wherein the fluid coming from a leak flows.

12. A stuffing seal (1) according to claim 11, wherein said actuator device is a flexible membrane (17) which hermetically separates at least one portion of said chamber from the external environment.

13. A stuffing seal (1) according to claim 8, wherein means (13b, 27) for permanently partially compressing said packing (5) in an axial direction are further provided.

14. A stuffing seal (1) according to claim 13, wherein the thrust performed on said packing (5) by said compression means is considerably lower than the thrust performed by said releasable means (11).

15. A stuffing seal (1) according to claim 13 or 14, wherein said compression means comprise a spring (27) interposed between said stuffing box (7) and said tooth (15b) of said lever (15).

16. A stuffing seal (1) according to claim 13 or 14, wherein said compression means comprise a blocking pivot (9b) parallel to said stem (103) placed between said case (3) and said stuffing box (7), provided with a nut (13b) which can be closed against said case (3) or against said stuffing box (7) for causing the axial compression of the packing (5).

17. A stuffing seal (1) according to any of the preceding claims, wherein between the bottom of said seat (3b) within said hole (3a) and said packing (5) a porous ring (23) and a plane washer (25) are further provided in sequence thanks to which said packing (5) is axially compressed against said stuffing box (7) when the pressure of a fluid acts against said porous ring (23).

18. A stuffing seal (1) according to claim 17, wherein said porous ring is a sintered metal net ring.

19. A stuffing seal (1) according to any of the preceding claims, wherein said packing (5) comprises a series of concentric rings (6) preferably made of metal or polymeric resin.

20. A valve (101) for fluids comprising:


- 11 -

a stem (103) for controlling the opening and the closing of the valve,
a primary seal (105) which maintains hermetically separated from the
external environment the fluid flowing through said valve (101),

5 an auxiliary seal able to intervene for maintaining hermetically
separated from the external environment the fluid flowing through said
valve (101) in case of breakage or misoperation of said primary seal (105),
characterised in that said auxiliary seal is a stuffing seal (1)
according to any of claims from 1 to 19.

10 21. A valve (101) for fluids according to claim 20, wherein said
primary seal further comprises a bellow seal (105) and a leak detector (16),
said leak detector (16) comprising a chamber (19), wherein the fluid flows
in case of leak, connected through a channel (21) to the volume (107)
inside said bellow seal (105).

15 22. A valve (101) for fluids according to claim 21, wherein said
primary seal comprises a multilayer bellow seal (105) and a leak detector
(16), said leak detector (16) comprising a chamber (19), wherein the fluid
flows in case of leak, connected through a channel (21) to the gap (105d)
defined between two layers of said multilayer bellow seal (105).

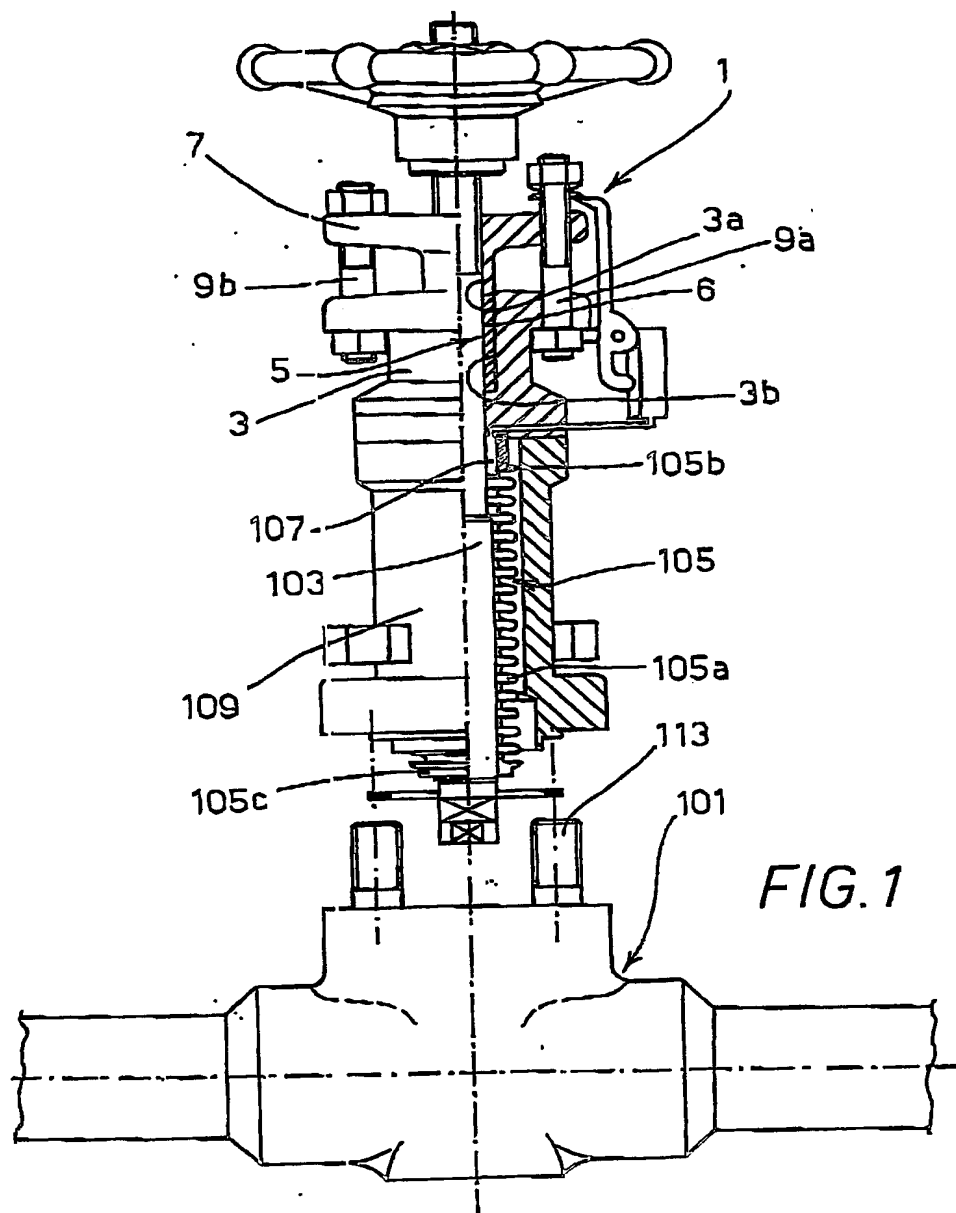

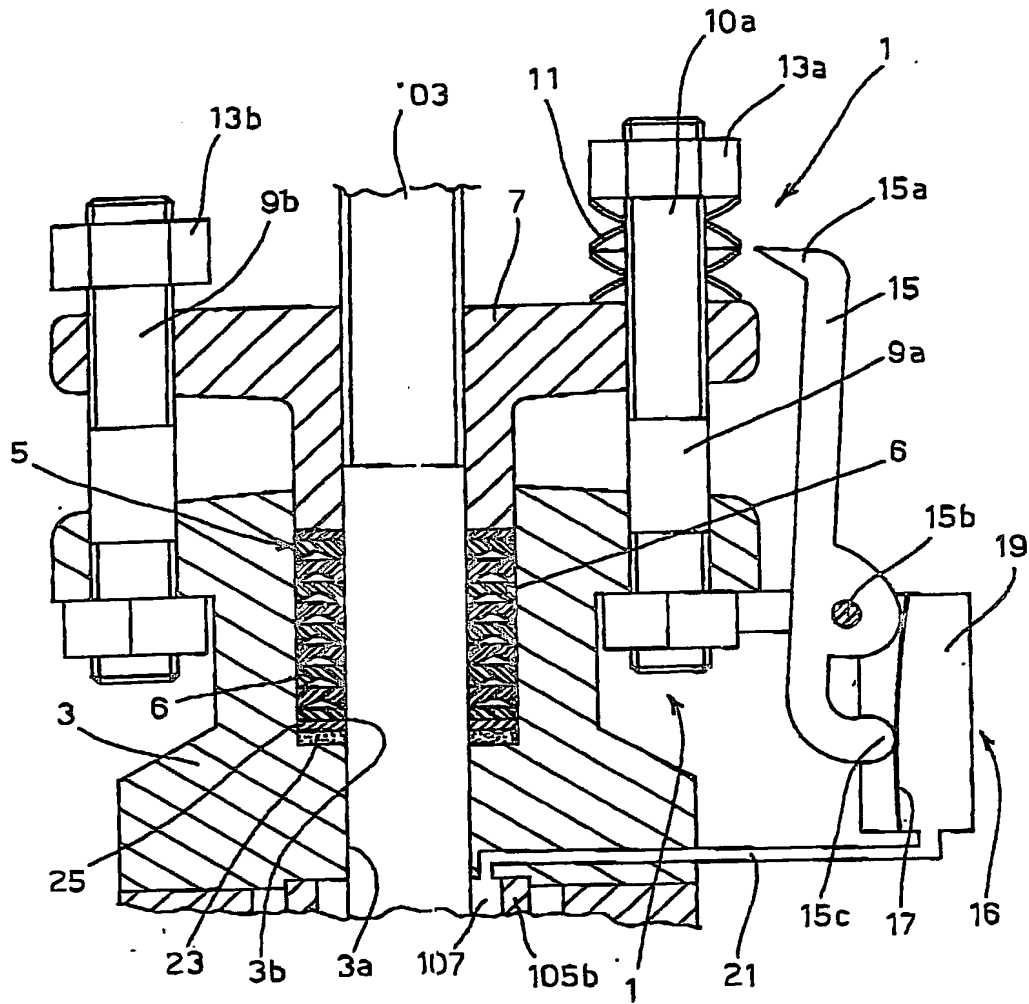


FIG. 3

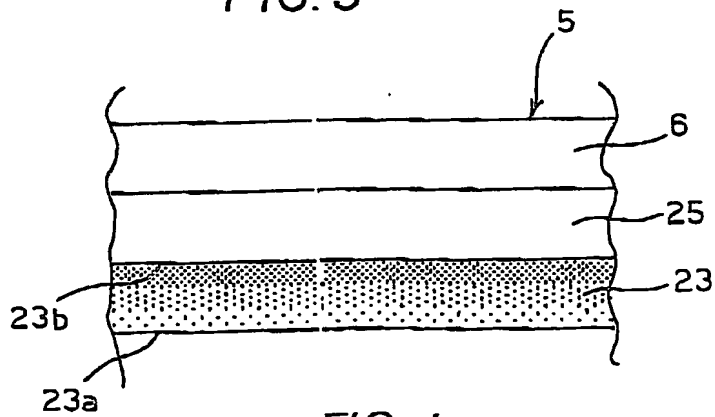


FIG. 4a

4/4

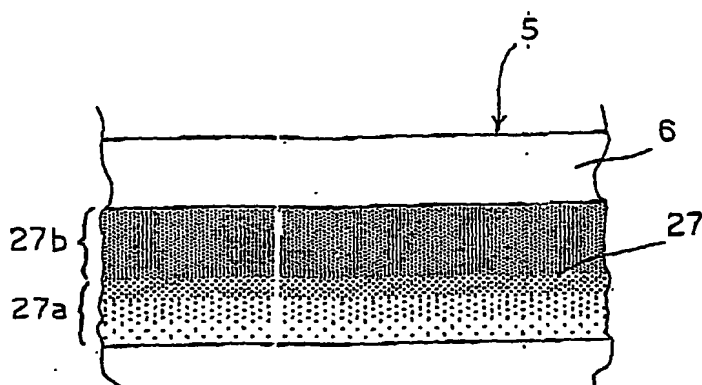


FIG. 4b

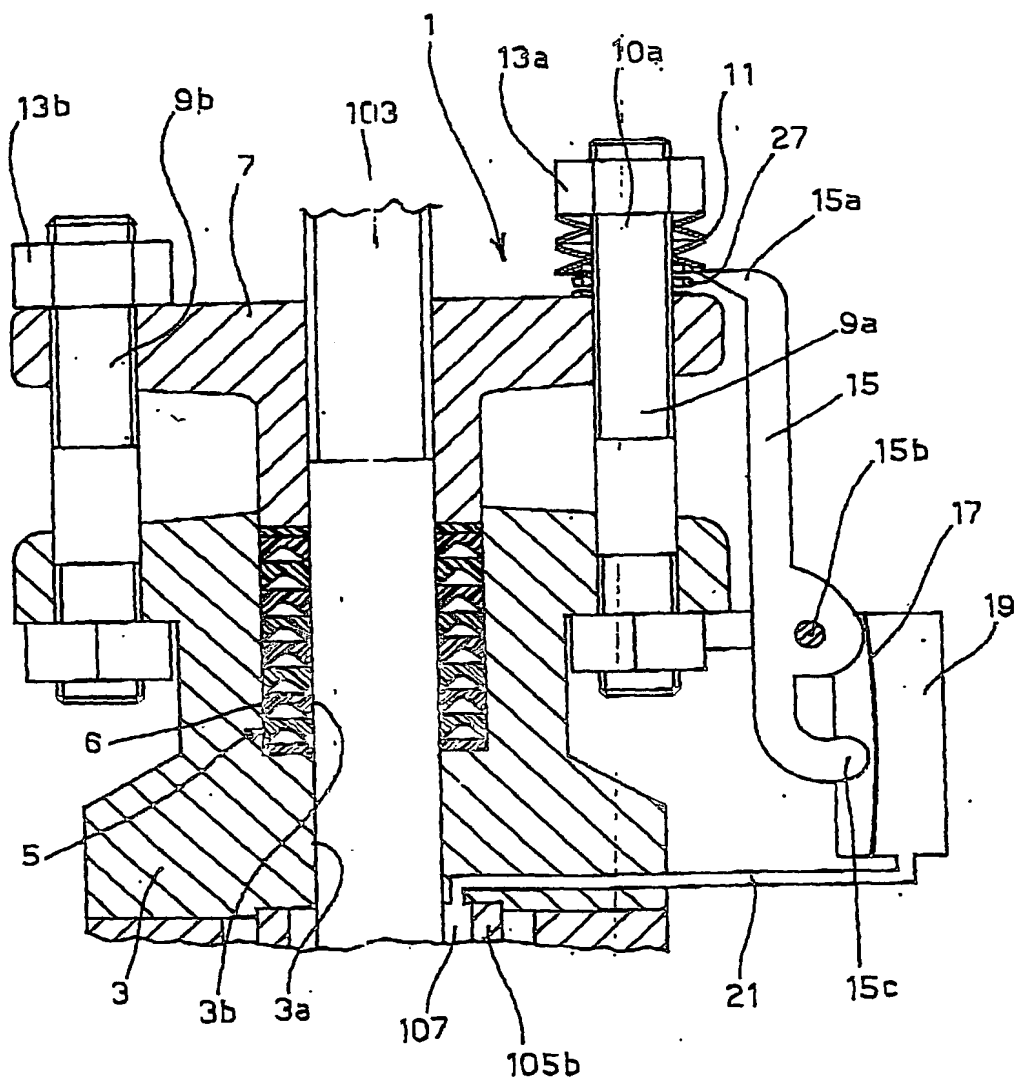


FIG. 5

INTERNATIONAL SEARCH REPORT

PCT/EP/000495

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F16K41/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F16K F16J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	DE 31 30 261 A (ALBRECHT AUTOMATIK GMBH & CO) 17 February 1983 (1983-02-17) page 5, paragraph 2 page 9, paragraph 3 page 10, paragraph 1 page 11, paragraph 3 page 14, paragraph 2 page 17, paragraph 2 -page 18, paragraph 1 figure	1-4, 19-21 10
X	GB 2 066 906 A (WOLFRAM BERGBAU HUETTEN GMBH) 15 July 1981 (1981-07-15) page 1, line 47 - line 65; figure 1	1-7, 19
X	US 4 340 204 A (HERD DAVID P) 20 July 1982 (1982-07-20) cited in the application figure 1	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

13 May 2004

Date of mailing of the international search report

25/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Rusanu, I

INTERNATIONAL SEARCH REPORT

PCT/EP20000495

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB 2 012 394 A (SECR DEFENCE) 25 July 1979 (1979-07-25) abstract; figure</p> <p>-----</p>	<p>10,11, 20,21</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

PCT/EP 4/000495

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 3130261	A	17-02-1983	DE 3130261 A1	17-02-1983
GB 2066906	A	15-07-1981	AT 364211 B	12-10-1981
			AT 743079 A	15-02-1981
US 4340204	A	20-07-1982	CA 1113914 A1	08-12-1981
			DE 2840323 A1	29-03-1979
			FR 2403503 A1	13-04-1979
			GB 2004351 A ,B	28-03-1979
			GB 2089476 A ,B	23-06-1982
			JP 54053322 A	26-04-1979
			US 4272055 A	09-06-1981
GB 2012394	A	25-07-1979	NONE	